


Fact sheet **ECO-Skate** NY-wheel

NY Ø50x46xØ15

HTS

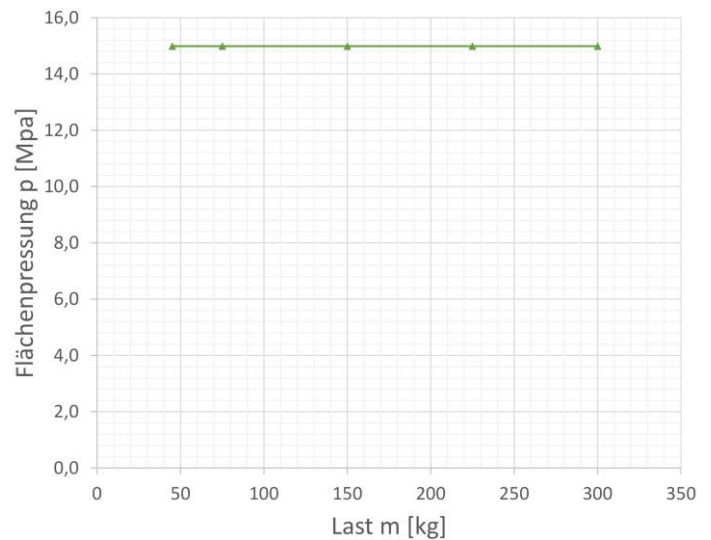

Specification:

- Low rolling resistance
- Extremely durable and low wear. Risk of breakage when subjected to impact loads with high weights
- Corrosion resistant (depending on installed deep groove ball bearing)
- Temperature resistance -30 to 80°C
- Hygienic
- Trackless / abrasion resistant
- Contact discoloration free
- Very good resistance to many acids, alkalis, oils and greases
- For use on hard and smooth floors. Floor must be clean

Technical data:

# 11 050 11 42	5,5 x 37 = 204 mm ² ▼ 15,0 MPa	MAT NY, 80 Shore D
312,5 daN	Ø50x46 - Ø15 mm	0,14 kg
15,6 dN	9,4 dN	V _{max} = 2 km/h

Please always observe the operating instructions, their safety instructions and local conditions!

# Part No.	Area mm ² of the roller surface pressure ▼ N / mm ²	MAT Wheel material layer, core: AL Aluminium, NY Nylon PU Polyurethane, ST Steel	Carrying Capacity of load moving skate in daN at 2km/h max.	* Varies depending on the tolerances of the floor and ambient situation. All information without guarantee.
Dimensions of wheel, inside ball bearing diameter mm	Weight kg	Starting resistance* in daN, required force to start moving, under ideal conditions	Traction* in daN, required force to move the load at a steady speed of 2 km/h under ideal conditions	